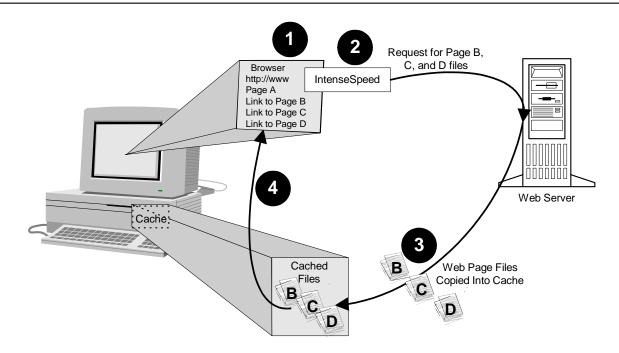Introduction

Figure 1-3: The Web with IntenseSpeed

The Web With IntenseSpeed

1 Web Page A is displayed in the browser.

2 In the background, IntenseSpeed requests files for pages B, C, and D from the Web Server while the user is looking at Page A.

3 Files for Pages B, C, and D are stored to the browser cache ready to load when user clicks on their links.

4 When user is finished with Page A and clicks a link for another page (Pages B, C, or D) available from Page A, cached files are immediately displayed in the Browser.